

**GS724TP and GS748TP**

## Full 24-port or 48-port PoE Solution Plus Easy Browser-based Management



NETGEAR ProSafe Smart Switches fill the gap between unmanaged and fully managed switches. The family of ProSafe Smart Switches is designed for growing businesses that want control over their network without the cost and complexity of a full Layer 2 management implementation. These PoE capable Smart Switches, the GS724TP and GS748TP, provide power and data using built-in IEEE 802.3af PoE on all 24 or 48 ports. In addition, they offer an intuitive web-based management tool for quick and easy deployment and configuration making it ideal for deploying access points, VoIP phones and IP-based surveillance cameras. This switch is equipped with highly advanced features such as Access Control Lists (ACL), 802.1x port authentication, enhanced QoS, rate limiting and IGMP Snooping among others to provide a small and medium-sized business with a network that is geared for growth while providing scalability and reliability. With the utility of 24 or 48 10/100/1000 Mbps ports, two or four combination (Copper/hot-swappable Small Form-factor Pluggable (SFP)) Gigabit ports for optional fiber connectivity, growing business networks, classrooms and workgroups can benefit from superior performance and keep up with expanding network needs. These high performing switches feature a nonblocking wire-speed architecture with a 48 Gbps or 96 Gbps switching capacity for maximum data throughput.

All 24 and 48 RJ-45 ports automatically negotiate to the highest speed and support Auto Uplink™ technology to make the right link.

**Full-featured, flexible Power over Ethernet (PoE)**

With a total power budget of 192 Watts for the GS724TP and 384 Watts for the GS748TP, customers can choose to plug in up to 48 802.3af IP-based devices. Power-over-Ethernet (PoE), optimizes the installation and power management of network devices such as wireless access points (AP), Voice over IP (VoIP) phones, and IP-based surveillance cameras. Power-over-Ethernet (IEEE 802.3af) capabilities reduce installation time and costs for many new network productivity devices. Free your wireless AP deployments and IP cameras from the restrictions of power outlet proximity using a standard CAT-5 cable. Enable uninterrupted power supply for all your PoE devices by powering your switch from a UPS device.

**Advanced Security**

These switches also provide advanced features that provide more robust security to the SMBs. These include:

- 802.1x for authentication
- ACL filtering to permit or deny traffic based on MAC or IP addresses.

**Advanced Quality of Service**

Priority queuing ensures high-priority traffic gets delivered efficiently, even during congestion from high traffic bursts. Companies implementing network telephony or video conferencing, for example, need to be able to prioritize such voice and video traffic and other real-time applications over less latency-sensitive traffic to ensure reliability and quality. The ability to prioritize traffic ensures quality of latency-sensitive services and applications despite increasing traffic loads. The ProSafe GS724TP and GS748TP provide several advanced QoS features:

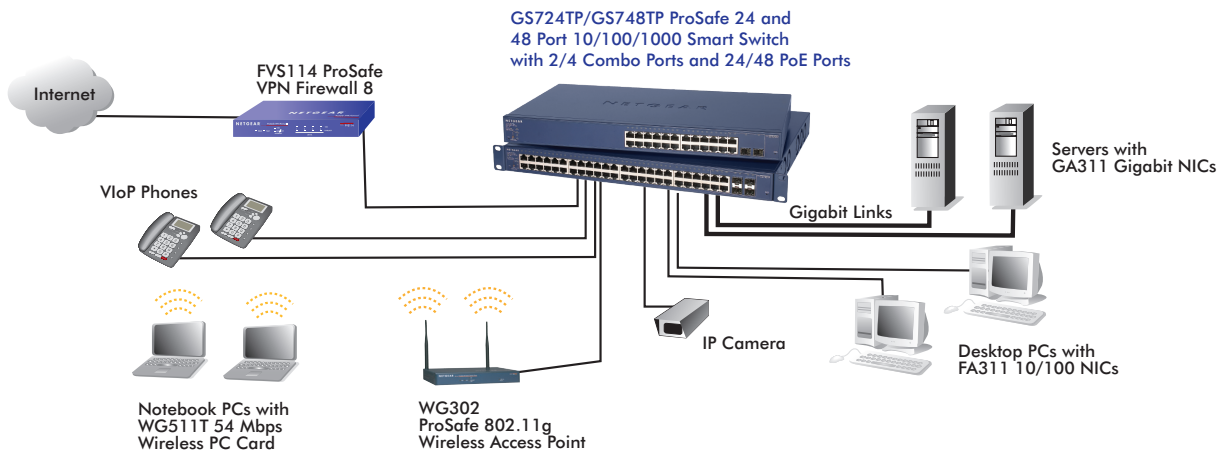
- 802.1p based prioritization
- Layer 3-based (DSCP) prioritization
- Rate-limiting



**“Smart” Management Features**

Manage all ProSafe Smart Switches from an easy-to-use Web console that can be used to configure all features, as well as monitor and trouble-shoot. These switches also have SNMP (v1, 2 and 3) to collect and track data to monitor the network health, as well as manage devices, and more easily enforce critical IT controls and policies. SNMP v2c is most commonly deployed, as it provides better reporting capabilities than SNMP v1. Companies interested in more robust security may opt for SNMP v3, which provides data encryption.

These ProSafe Smart Switches provide world-class reliability with a Limited Lifetime warranty and optional ProSupport Maintenance Packages. These switches are optimized for ProSafe Network Management Software (NMS100) and works with other SNMP-based management software.

**Electromagnetic Emissions:**

- CE mark, commercial
- FCC Part 15 Class A
- VCCI Class A
- C-Tick

**• Environmental Specifications**

- Operating temperature: 32 to 104° F (0 to 50° C)
- Storage temperature: -4 to 158° F (-20 to 70° C)
- Operating humidity: 90% maximum relative humidity, non-condensing
- Storage humidity: 95% maximum relative humidity, non-condensing
- Operating altitude: 10,000 ft (3,000 m) maximum
- Storage altitude: 10,000 ft (3,000 m) maximum

**• LEDs**

- Per port: (10/100 and Gigabit): Link/ Activity, Speed
- Per device: Power
- Per device: Fan Failure
- Per PoE ports: PoE Power, PoE fault

**• Electromagnetic Immunity**

- EN 55024

**• Safety**

- CE mark, commercial
- cUL IEC950/EN60950

**• Administrative Switch Management**

- IEEE 802.1Q Static VLAN (128 groups, Static)
- Voice VLAN
- IEEE 802.1p Class of Service (CoS)
- Port-based QoS
- DSCP-based QoS
- IEEE802.3ad Link Aggregation (manual or LACP)
- IEEE 802.1D Spanning Tree Protocol
- IEEE 802.1w Rapid Spanning Tree Protocol
- SNMP v1, v2c, v3
- RFC 1213 MIB II
- RFC 1643 Ethernet Interface MIB
- RFC 1493 Bridge MIB
- RMON group 1, 2, 3, 9
- RFC 2131 DHCP client
- IEEE 802.1x

- Jumbo frame support
- Port-based security by locked MAC addresses
- Layers 2-4 based ACL
- Storm control for broadcast, multicast and unknown unicast packets
- IGMP Snooping v1/v2
- Port-based ingress rate limiting
- STNP
- Port Mirroring Support
- Web-based configuration
- Configuration Backup/Restore
- Password Access Control
- RADIUS Support
- TACACS+ Support
- Syslog
- Firmware upgradeable

**System Requirements**

- Category 5 network cables
- Network card for each PC
- Network software (e.g., Windows®)
- Web Browser (e.g., Internet Explorer 5.0 or higher, Netscape 6.0 or higher)

## Technical Specifications

### • Network Protocol and Standards Compatibility

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-X
- IEEE 802.3x full-duplex flow control
- IEEE 802.3af (Power over Ethernet)

### • Power Supply

- Max 225 Watts for GS724TP
- Max 465 Watts for GS748TP
- 100-240VAC/50-60 Hz universal input
- PoE Budget: GS724TP 192 Watts; GS748TP 384 Watts

### • Network Ports

- GS724TP:
  - 24 10/100/1000 Mbps auto sensing Gigabit Ethernet
  - 2 combo Gigabit Copper/SFP slots
- GS748TP:
  - 48 10/100/1000 Mbps auto sensing Gigabit Ethernet
  - 4 Combo Gigabit Copper/SFP slots

### • Physical Specifications

- GS724TP Dimensions: (W x D x H) 440 x 257 x 43 mm (17.3 x 10.1 x 1.6 in.)
- GS724TP Weight: 3.7 kg (8.1 lb.)
- GS748TP Dimensions: (W x D x H) 440 x 438 x 43 mm (17.3 x 17.2 x 1.6 in.)
- GS748TP Weight: 6.6 kg (14.5 lb.)

### • Performance Specifications

- Forwarding modes: Store-and-forward
- Bandwidth: GS724TP: 48 Gbps  
GS748TP: 96 Gbps
- Network latency: <2,900 ns for 64-byte frames in store-and forward mode for 1,000 Mbps to 1,000 Mbps transmission
- Buffer memory: 3 Mb per system
- Address database size: 4,000 media access control (MAC) addresses per system
- Addressing: 48-bit MAC address

### • Mean Time Between Failure (MTBF)

- GS724TP: 165,589 hours (~19 years)
- GS748TP: 147,559 hours (~17 years)

### • Modules

- AGM731F 1000BASE-SX SFP Module
- AGM732F 1000BASE-LX SFP Module
- AGM733 1000BASE-LZ SFP Module

### • Warranty

- NETGEAR Limited Lifetime warranty

### Package Contents

- 24-port or 48-port Smart Switch with Gigabit Ports and POE, GS724TP or GS748TP
- Rubber footpads
- Power cord
- Rack-mount kit
- Resource CD
- Installation guide
- Warranty/Support information card
- Category 5 cable

## Related NETGEAR ProSafe Products

- GA311 32-bit Gigabit PCI Adapter
- GS724TS 24-Port Gigabit Stackable Smart Switch
- GS748TS 48-Port Gigabit Stackable Smart Switch
- GS724T 24-port Gigabit Smart Switch
- GS716T 16 Port Gigabit Smart Switch
- GS748T 48-port Gigabit Smart Switch
- FS726T 24-port 10/100 Smart Switch with 2 Gigabit Ports
- FS750T2 48-port 10/100 Smart Switch with 2 Gigabit Ports
- FS728TP 24+4 10/100 Smart Switch with Full POE
- FS726TP 24-port 10/100 Smart Switch with 2 Gigabit Ports and 12 Port PoE
- FS728TS 24 Port 10/100 Stackable Smart Switch + 4 Gigabit Ports
- FS752TS 48 Port 10/100 Stackable Smart Switch + 4 Gigabit Ports
- FS752TPS 48 Port 10/100 Stackable Smart Switch with 4 Gigabit Ports and 24 Port PoE
- GS105 5-port Gigabit Switch
- GS108 8-port Gigabit Switch
- GS116 16-port Gigabit Switch
- JGS516 16-port Gigabit Switch
- JGS524 24-port Gigabit Switch
- **ProSupport Service Packs Available**
  - PMB0331 – OnCall 24x7, Advanced Tech Support with Next Business Day HW Replacement (3 Years)
  - PRR0331 – XPressHW, Next Business Day HW Replacement (3 Years)

# NETGEAR®

4500 Great America Parkway  
Santa Clara, CA 95054 USA  
1-888-NETGEAR (638-4327)  
E-mail: [info@NETGEAR.com](mailto:info@NETGEAR.com)  
[www.NETGEAR.com](http://www.NETGEAR.com)

© 2007 NETGEAR, Inc. NETGEAR, the NETGEAR logo, Connect with Innovation, Everybody's connecting, the Gear Guy logo, IntelliFi, ProSafe, RangeMax and Smart Wizard are trademarks or registered trademarks of NETGEAR, Inc. in the United States and/or other countries. Microsoft, Windows, and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice. All rights reserved.

\*Free basic installation support provided for 90 days from date of purchase. Advanced product features and configurations are not included in free basic installation support; optional premium support available.

DS-GS724TP/GS748TP-03/07