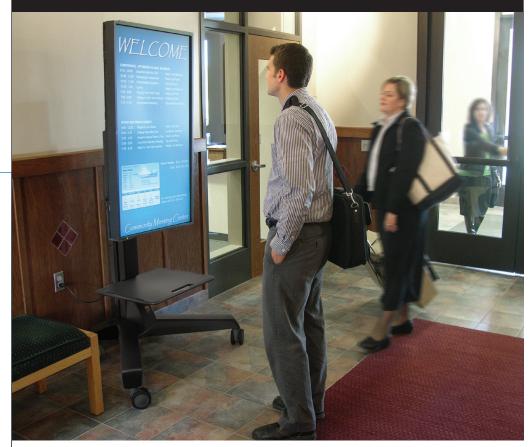# ERGOTRON®

Neo-Flex® Mobile MediaCenter

Highlights

- Move digital signage and images to where you need them

- Rotate your display to portrait or landscape orientation—no need to reinstall display

- Optional camera shelf accessory converts any space into a videoconference center

- Easily roll cart through standard-size doorways and over thresholds

- Narrow footprint allows presenter to move closer to the display; easily tucks into corners or nests with other carts for space-saving storage

- Patented Constant Force™ Technology enables smooth, effortless portrait- to-landscape rotation, tilt and height adjustment. Adjusts with just a touch—no knobs or levers

- Modular cable management channels conceal and organize cables

- Maximize your technology investment by sharing a large display over multiple rooms

- Second-generation design and 47 separate quality tests ensure reliability and optimum performance

- Speedy assembly and installation

Stretch your display media investment with lift, tilt, rotation and mobility

Bring digital content to life with Ergotron's sleek Neo-Flex Mobile MediaCenter. With effortless height adjustment and integrated portrait-to-landscape capability, this cart stretches your investment by serving a variety of projection needs in rooms throughout a facility. Affordability, simple assembly and effortless operation make the Mobile MediaCenter perfect for digital signage, conferencing and other applications.

JUST STAND .ORG

- Complies with UL Tip Standards 1667 and 1678
- Rugged plastic-composite shelf conveniently attaches to cart at any height
- Modular cable channel system is adaptable for various wiring configurations
- Portrait orientation is not recommended for some plasma displays. Contact display manufacturer if you have questions regarding your plasma's portrait-mode capability (this is not an issue with LCD technology)
- CPUs attach safely to rear of cart with Universal CPU Holder accessory (ordered separately). Compatible with CPU sizes from 12" H x 3" D to 18" H x 8.5" D (300 x 80 mm to 460 x 220 mm)
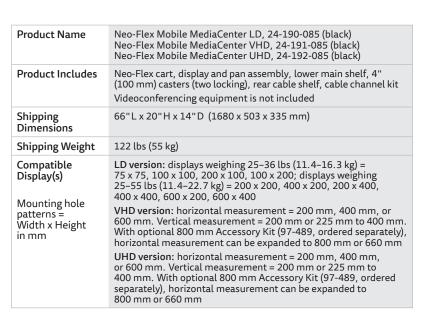
  Small CPUs with VESA hole-mounting pattern can be mounted behind the display with the MMC VESA-CPU Mount (ordered separately); VESA-compliant (75/100 mm) thin client CPU must have either a 75 x 75 mm or 100 x 100 mm mounting hole pattern.
- Add the MMC Camera Shelf Kit (97-491-085, ordered separately) to place adjustable camera shelf above the display
- Three-year warranty

LD LCD Size	LCD Weight*	Lift	Tilt	Pan	Rotation	VESA
27–55"	25–50 lbs 11,4–22,7 kg	20" 51 cm	20°	—	90°	MIS-D/E/F

VHD LCD Size	LCD Weight*	Lift	Tilt	Pan	Rotation	VESA
37–60"	50–90 lbs 22,7–40,9 kg	20" 51 cm	20°	—	90°	MIS-D/F

UHD LCD Size	LCD Weight*	Lift	Tilt	Pan	Rotation	VESA
50–70"	90–120 lbs 40,9–54,4 kg	20" 51 cm	20°	—	90°	MIS-D/F

* Weight capacity: main shelf = 30 lbs (13,6 kg); cable shelf = 5 lbs (2,2 kg); if MMC Camera Shelf Kit is added, display weight capacity is diminished by 3 lbs (1,4 kg); if 800 mm Kit is added the display weight capacity is diminished by 5 lbs (2,3 kg)

Product Name	Neo-Flex Mobile MediaCenter LD, 24-190-085 (black) Neo-Flex Mobile MediaCenter VHD, 24-191-085 (black) Neo-Flex Mobile MediaCenter UHD, 24-192-085 (black)
Product Includes	Neo-Flex cart, display and pan assembly, lower main shelf, 4" (100 mm) casters (two locking), rear cable shelf, cable channel kit Videoconferencing equipment is not included
Shipping Dimensions	66" L x 20" H x 14" D (1680 x 503 x 335 mm)
Shipping Weight	122 lbs (55 kg)
Compatible Display(s) Mounting hole patterns = Width x Height in mm	**LD version:** displays weighing 25–36 lbs (11.4–16.3 kg) = 75 x 75, 100 x 100, 200 x 100, 100 x 200; displays weighing 25–55 lbs (11.4–22.7 kg) = 200 x 200, 400 x 200, 200 x 400, 400 x 400, 600 x 200, 600 x 400 **VHD version:** horizontal measurement = 200 mm, 400 mm, or 600 mm. Vertical measurement = 200 mm or 225 mm to 400 mm. With optional 800 mm Accessory Kit (97-489, ordered separately), horizontal measurement can be expanded to 800 mm or 660 mm **UHD version:** horizontal measurement = 200 mm, 400 mm, or 600 mm. Vertical measurement = 200 mm or 225 mm to 400 mm. With optional 800 mm Accessory Kit (97-489, ordered separately), horizontal measurement can be expanded to 800 mm or 660 mm

ERGOTRON®