

# Backup BRICs LCD Series

BR450ELCD/650ELCD/850ELCD

BRLCDD0012EU-01

## Wall-Mountable UPS to Make the Most of Your Work Space

**CyberPower®**  
Reliability. Quality. Value.




### Applications

- Home and Home Office
- Home Theater System
- Small Office

### Series Features

- GreenPower UPS™ Technology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- LCD Status Monitor
- USB Connectivity Port
- User-Replaceable Batteries
- Horizontal / Wall-mounted Use
- Cable Collector Included
- PowerPanel® Personal Edition Software

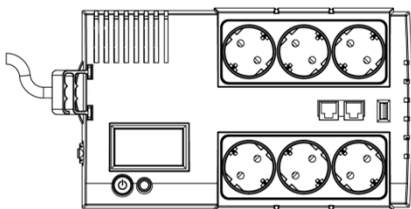

Battery Charger



Cable Collector

The BRICs LCD Series UPS offers home and small office users clean and stable battery backup while the featured RJ11/RJ45 port ensures phone, fax, and modem lines are protected from surges. With Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, this allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. The multifunction LCD readout provides immediate access to precise information of critical power/battery condition. For convenient mounting, these units can be installed in either a horizontal or wall-mounted placement to make the most of your space.

The included PowerPanel® Personal Edition management software showcases the feature rich abilities such as input/output power voltage readings, self-diagnostics, and approximate battery backup time. With the Energy-Saving Technology, the BRICs Series UPS can save up to 75% of electricity therefore save your electricity expenses.

Energy-Saving

AVR

Surge  
Protection

Phone Line  
Protection

LCD Display

USB Port to PC



**GreenPower UPS™**

#### ENERGY-SAVING TECHNOLOGY

The patented advanced energy-saving technology improves the operating efficiency and eliminates waste energy consumption.

### PowerPanel® Personal Edition Management S/W



#### AUTO-SHUTDOWN SOFTWARE

CyberPower PowerPanel® Personal Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.

*\*Software functions may vary due to firmware version and/or hardware constraints.*

# Backup BRICs LCD Series

BR450ELCD/650ELCD/850ELCD


**CyberPower®**  
Reliability. Quality. Value.

## Technical Specification

Model	BR450ELCD	BR650ELCD	BR850ELCD
Configuration			
Capacity (VA / Watts)	450 / 270	650 / 390	850 / 510
Energy-Saving Technology	Yes		
Input			
Frequency Range	47 Hz – 63 Hz (Auto Sensing)		
Output			
UPS Outlets (Numbers)	(6) Schuko or (6) FR or (6)UK (UK x 4+ IEC x 2) outlets		
On Battery Output Voltage	Simulated Sinewave at 230 Vac +/- 10%		
On Battery Output Frequency	50 Hz / 60 Hz +/- 1%		
Transfer Time (Typical)	4ms		
Overload Protection	On Utility: Circuit Breaker & Internal Current Limiting On Battery: Internal Current Limiting		
AVR	Single Boost		
Surge Protection and Filtering			
Surge Protection	Yes		
DSL / Phone / FAX / Modem Protection	Yes		
Physical			
Dimensions (H x W x D) (mm)	113.6 x 271 x 160.7		
Weight (kg)	4.4	5.5	6.4
Battery			
Sealed Maintenance Free Lead Acid Battery	12V / 4.5AH x 1	12V / 7AH x 1	12V / 8.5AH x 1
User Replaceable	Yes		
Typical Recharge Time	8 Hours		
Runtimes			
Half-load / Full-load (mins)	8 / 1	9/2	8/1
Status Indicators			
Indicators	Power On		
Audible Alarms	On Battery, Low Battery, Overload		
Communication			
PowerPanel® Personal Edition	Windows 7 / Vista / XP / 2000, Server 2008 / 2003, Linux		
Management			
Self Test	Yes		
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB		
Accessories			
External AA/AAA battery charger, connection via USB charger	Yes		

#All specifications are subject to change without notice. ©2012 Cyber Power Systems. All Trademarks are the property of their owners.

## Packaging Content:



Product Unit



USB Cable



Phone Cable



Cable Collector



User Manual



Software CD



Battery Charger



AN 30



DISTRIBUTED BY:

CyberPower's  
Manufacturing  
Facilities are  
ISO 9001:2000,  
ISO 14000, and  
QC080000  
Approved