


# Gigabit Fiber SFP Transceiver Module - HP J4858C Compatible - MM LC with DDM - 550 m (1804 ft.) - 10 Pack

Product ID: J4858C10PKST

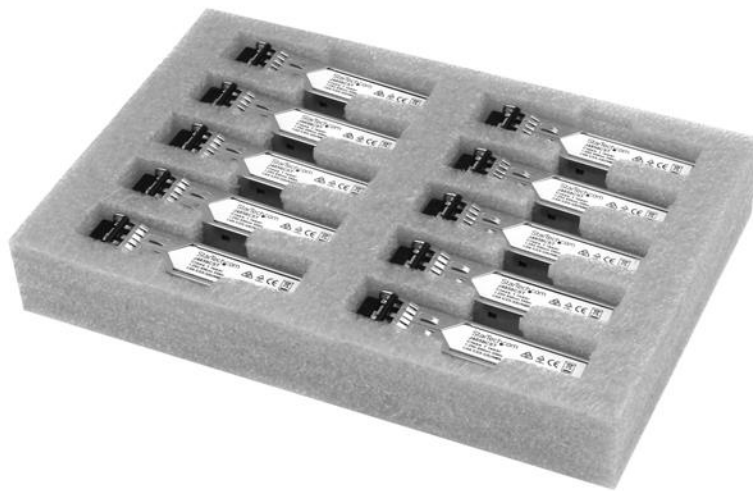

Ideal for large-scale deployments or installations on multiple devices, this bulk pack of HP® compatible Gigabit fiber SFPs is engineered by StarTech.com to deliver reliability and maximum cost savings. Built to exacting specifications and fully tested to ensure maximum performance, these high-quality transceiver modules can be installed into HP networking devices that support the J4858C transceiver module, as well as other major brands of networking equipment.

These 1000Base-SX SFPs deliver Gigabit connectivity over multimode fiber cable with a range of up to 550 m (1804 ft.). The SFP transceivers provide a dependable and cost-effective way to add, replace or upgrade the Gigabit fiber ports on your networking equipment, and they're backed by a lifetime warranty.

## **Built for reliable network performance**

The Gigabit SFP transceivers included in this 10-pack are manufactured by StarTech.com to meet or exceed OEM specifications and comply with the industry's MSA (Multi-Source Agreement) standards. Committed to the highest standards of quality, StarTech.com produces an extensive range of networking products including copper and fiber network cards, fiber media converters, Ethernet switches and wireless products.

## **Fully compatible with HP and other major brands**

These Gigabit multimode SFPs are engineered to the highest quality standards and are 100% HP compatible, equivalent to the HP J4858C mini-GBIC. StarTech.com SFP transceivers are configured and fully tested to ensure they work seamlessly with HP or other major brands of networking equipment.

You can be assured that the use of StarTech.com SFP products should not affect the warranty protection of your networking equipment.

## **Convenient and scalable**

Delivering both convenience and scalability, these Gigabit fiber transceivers are fully hot-pluggable, which enables you to install them without interrupting network traffic or having to reboot your equipment. They provide a versatile and cost-effective solution that's compatible with a wide range of Gigabit fiber networking devices.

Ideal for use in HP switches, routers and other networking equipment, the SFPs provide reliable performance, enabling you to expand your network to remote segments cost-effectively. The SFP transceivers support multimode fiber cable with a maximum distance of 550 m or 1804 ft., and maximum data rates of up to 1.25Gbps. The GbE fiber SFPs also support Digital Diagnostics Monitoring (DDM).

You can count on J4858C10PKST for reliable performance, backed by a lifetime warranty and free lifetime technical support.

### Certifications, Reports and Compatibility



### Applications

- Replace defective or damaged SFPs in MSA compliant or HP equipment
- Ideal for deployment in network devices with multiple SFP slots
- Expand your network to remote segments

### Features

- Delivers reliable Gigabit Ethernet connections for 1000Base-SX compliant networks
- 100% HP compatible, equivalent to J4858C
- Backed by lifetime warranty and free lifetime technical support
- Meets or exceeds OEM specifications and MSA (Multi-Source Agreement) industry standards
- Supports Digital Diagnostics Monitoring (DDM)
- 850 nm optical wavelength
- Multimode with maximum distance of up to 550 m (1804 ft.) and LC fiber connector
- Maximum data rates up to 1.25Gbps
- Hot-pluggable

<b>Hardware</b>	Warranty	Lifetime
	Industry Standards	IEEE 802.3z 1000BASE-SX
	WDM	No
<b>Performance</b>	Compatible Networks	1000 Mbps (1 Gbps)
	DDM	Yes
	Fiber Operating Mode	Half/Full-Duplex
	Fiber Type	Multi Mode
	Max Transfer Distance	550 m (1804 ft)
	Maximum Data Transfer Rate	1.25 Gbps
	MTBF	3,381,761 hours
	Wavelength	850nm
<b>Connector(s)</b>	Local Unit Connectors	1 - Fiber Optic LC Duplex Female
<b>Special Notes / Requirements</b>	<b>Note</b>	For use in Gigabit fiber networking equipment and media converters
	System and Cable Requirements	MSA or HP compliant SFP port
<b>Environmental</b>	Humidity	30~75% RH
	Operating Temperature	0°C to 70°C (32°F to 158°F)
	Storage Temperature	-40°C to 85°C (-40°F to 185°F)
<b>Physical Characteristics</b>	Color	Silver
	Enclosure Type	Aluminum
	Product Height	0.5 in [13 mm]
	Product Length	2.2 in [56.6 mm]
	Product Weight	0.6 oz [16 g]
	Product Width	0.5 in [12.5 mm]
<b>Packaging Information</b>	Shipping (Package) Weight	7.6 oz [215 g]
<b>What's in the Box</b>	Included in Package	10 - SFP transceivers

Product appearance and specifications are subject to change without notice.