

High-Performance Integrated Firewalls

For Business Network Security

- Integrated Firewall/VPN Appliance
- Proactive Network Security
- Increase Network Efficiency & Utilization
- Multiple User-Configurable Ethernet/Gigabit Interfaces
- Powerful Firewall & VPN Data Encryption Performance
- Unrestricted User Support

FEATURES

Integrated Functions

- Firewall Protection
- Proactive Security With ZoneDefense Mechanism³
- Content Filtering/Intrusion Detection
- User Authentication
- Instant Message/P2P Blocking
- Denial of Service (DoS) Protection
- Virtual Private Network (VPN) Security
- Bandwidth Management

Content Filtering

- URL/E-Mail Filtering
- Java Script/Active X/Cookie Filtering
- IM/P2P Program Filtering

Fault Tolerance

- WAN Traffic Fail-Over
- Active/Passive Modes for High Availability¹

Bandwidth Management

- WAN Traffic Bandwidth Management
- Multi-WAN Interfaces for Traffic Load Sharing/Load Balancing
- Policy-Based Routing

Hardware

- Powerful Firewall Engines
- Multiple User-Configurable Ports
- High-Speed Gigabit Interfaces¹

Setup & Management

- Installation Wizard for Quick Setup
- Easy Web-Based Configuration/Management
- Command Line Interface (CLI)
- Logging and Real-Time Monitoring
- Centralized Management²

¹ For DFL-1600 and DFL-2500 only

² Used in conjunction with D-Link Central Management Device (DFL-1600 and DFL-2500 only)

³ For DFL-800, DFL-1600 and DFL-2500 only

With businesses becoming increasingly network-dependent, your investment in a reliable network security solution becomes crucial. D-Link NetDefend presents you a series of powerful next-generation business-class network security solutions. NetDefend addresses your growing concerns over network security, hacker attacks, virus threats and increasing privacy demands. Each firewall in this series can offer you a high return on investment through robust security features, flexible configuration and maximum network protection.

D-Link NetDefend firewalls provide you with the assurance of a dedicated network security solution, with integrated functions including firewall, load balance, fault tolerance, ZoneDefense, content filtering, user authentication, instant message and peer-to-peer application blocking, Denial of Service (DoS) protection and Virtual Private Network (VPN) secure remote connection. These devices meet the security and remote access needs of business that demands high performance at competitive prices. Advanced features are integrated and packed into a single housing to provide your network administrators with an all-in-one business-class level security solution.


To minimize any impact of a disaster on an entire network, D-Link NetDefend firewalls include a special feature called ZoneDefense -- a mechanism that operates seamlessly with D-Link LAN switches to perform proactive network security. ZoneDefense automatically quarantines infected computers on the network and prevents them from flooding your network with malicious traffic.

Within an industrial chassis, D-Link NetDefend firewalls pack up an impressive set of hardware that includes high-speed processors, large databases and firewall power to handle up to a million concurrent sessions. These firewalls come with multiple user-configurable interfaces, including high-speed Gigabit ports, for flexible, scalable and bottleneck-free network deployments linking your different workgroups and enterprises together.

All firewalls in this series can be remotely managed via a web-based interface or through a dedicated VPN connection. They include flexible features to monitor and maintain a healthy and secure network, such as e-mail alerts, system log and real-time statistics. These features, along with the ability for firmware upgrade, ensure that your firewall can provide and maintain maximum performance and security for your network.



NETDEFEND[™]

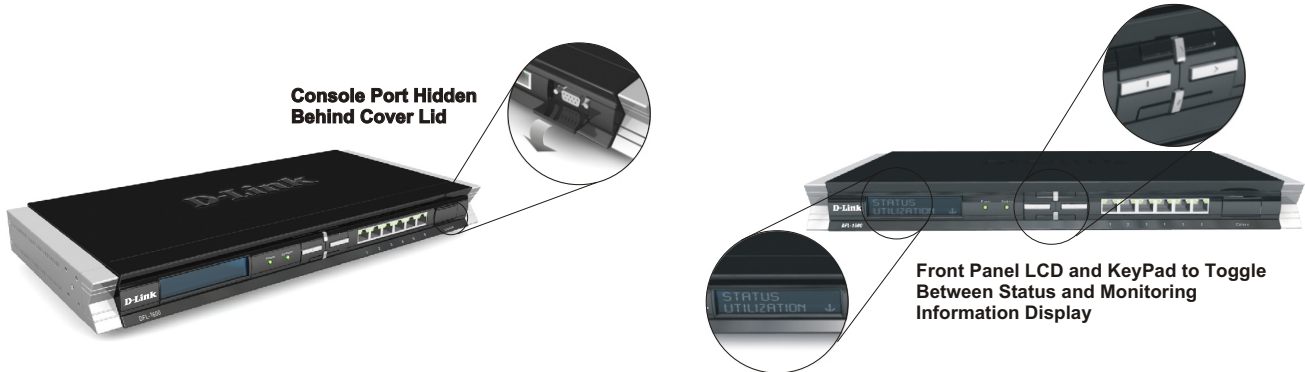

4 Distinctive Firewalls

For 4 Different Business Sizes

DFL-210 FOR SOHO

- Firewall Throughput: 80Mbps
- VPN Performance: 25Mbps (3DES/AES)
- 1 Ethernet WAN Port, 4 Ethernet LAN Ports, 1 Ethernet DMZ Port *



DFL-800 FOR SMALL BUSINESS

- Firewall Throughput: 150Mbps
- VPN Performance: 60Mbps (3DES/AES)
- 2 Ethernet WAN Ports, 7 Ethernet LAN Ports, 1 Ethernet DMZ Port *



DFL-1600 FOR MEDIUM BUSINESS

- Firewall Throughput: 320Mbps
- VPN Performance: 120Mbps (3DES/AES)
- 6 User-Configurable Gigabit Ports



DFL-2500 FOR ENTERPRISE

- Firewall Throughput: 600Mbps
- VPN Performance: 300Mbps (3DES/AES)
- 8 User-Configurable Gigabit Ports



* DMZ port is user-configurable.

Integrated VPN/Firewall Functions

Complete Range of Firewalls for Workgroups & Enterprises

A complete range of firewalls designed to meet different criteria for workgroups' and enterprises' infrastructures, information security needs, total costs of ownership and performance requirements.

Next-Generation User Interfaces


Extreme ease of use and humanized vision embedded in next-generation networking products. NetDefend firewalls make extensive use of these features to render your configuration and management tasks as simple as a child's play.

High-Speed Gigabit Interfaces

Multiple user-configurable interfaces, including high-speed Gigabit ports, for flexible, scalable and bottleneck-free network deployments linking different small/medium-sized workgroups and enterprises together.


Proactive Network Security

Minimal disaster impact on your entire network. NetDefend firewalls feature a ZoneDefense mechanism that operates seamlessly with your D-Link LAN switches to perform proactive network security. NetDefend firewall can also block IM/P2P programs and filter contents to increase the efficiency and utilization of your network.

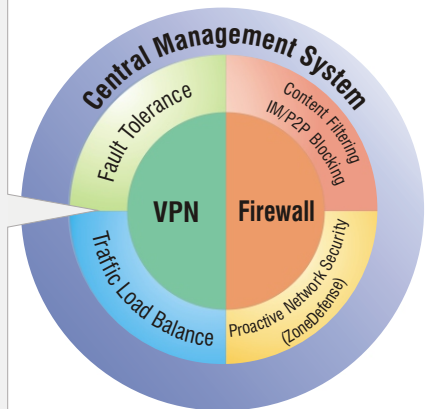

Effective Bandwidth Management

- Traffic Bandwidth Management
- Multi-WAN Interfaces for Traffic Load Sharing
- Policy-Based Routing

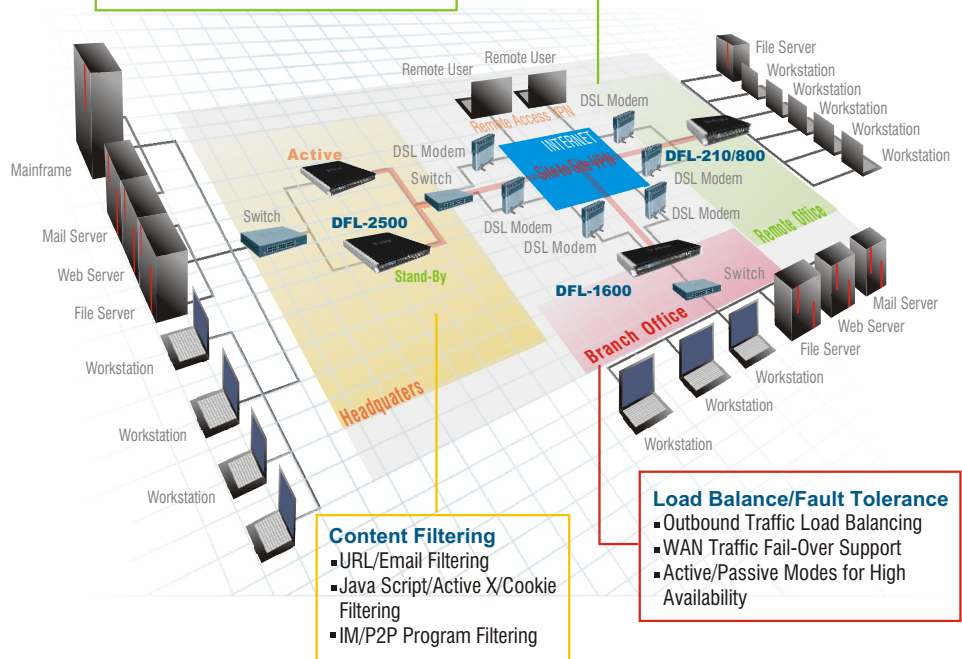

Content Filtering

- URL/Email Filtering
- Java Script/Active X/Cookie Filtering
- IM/P2P Program Filtering

Load Balance/Fault Tolerance

- Outbound Traffic Load Balancing
- WAN Traffic Fail-Over Support
- Active/Passive Modes for High Availability

Specification Chart

DFL-210

DFL-800

DFL-1600

DFL-2500



Specification Chart		DFL-210	DFL-800	DFL-1600	DFL-2500
Interfaces	Multiple User-Configurable Ports	1 Ethernet WAN Port 1 Ethernet DMZ Port ³ 4 Ethernet LAN Ports	2 Ethernet WAN Ports 1 Ethernet DMZ Port ³ 7 Ethernet LAN Ports	6 User-Configurable Gigabit Ports	8 User-Configurable Gigabit Ports
System Performance ⁴	Firewall Throughput	80Mbps	150Mbps	320Mbps	600Mbps
	VPN Throughput	25Mbps	60Mbps	120Mbps	300Mbps
	Concurrent Sessions	12,000	25,000	400,000	1,000,000
	Policies	500	1,000	2,500	4,000
Firewall System	PPPoE	✓	✓	✓	✓
	Transparent Mode	✓	✓	✓	✓
	NAT, PAT	✓	✓	✓	✓
	Dynamic Routing Protocol	-	OSPF	OSPF	OSPF
	H.323 NAT Traversal	✓	✓	✓	✓
	Time-Scheduled Policies	✓	✓	✓	✓
	Application Layer Gateway (ALG)	✓	✓	✓	✓
Networking	Proactive Network Security		ZoneDefense	ZoneDefense	ZoneDefense
	DHCP Server/Client	✓	✓	✓	✓
	DHCP Relay	✓	✓	✓	✓
	Policy-Based Routing	✓	✓	✓	✓
	IEEE 802.1q VLAN	✓	✓	✓	✓
	IP Multicast ¹	IGMP, IGMP Snooping	IGMP, IGMP Snooping	IGMP, IGMP Snooping	IGMP, IGMP Snooping
Virtual Private Network (VPN)	Encryption Methods (DES/3DES/AES/Twofish/Blowfish/CAST-128)	✓	✓	✓	✓
	Dedicated VPN Tunnels	100	300	1,200	2,500
	PPTP/L2TP Server	✓	✓	✓	✓
	Hub and Spoke	✓	✓	✓	✓
	IPSec NAT Traversal	✓	✓	✓	✓
System Management	Console Interface	RS-232	RS-232	RS-232	RS-232
	Web-Based User Interface	HTTP, HTTPS	HTTP, HTTPS	HTTP, HTTPS	HTTP, HTTPS
	Command Line/SSH	✓	✓	✓	✓
	Firmware Upgrade	✓	✓	✓	✓
	Config. Backup/Restore	✓	✓	✓	✓
	Trust Host for Remote Management	✓	✓	✓	✓
	Central Management System ²	✓	✓	✓	✓
User Authentication	Built-in Database	✓	✓	✓	✓
	External Database				
	▪ RADIUS	✓	✓	✓	✓
	▪ LDAP ¹	✓	✓	✓	✓
	▪ Active Directory	✓	✓	✓	✓
	IP and MAC Binding	✓	✓	✓	✓
	XAUTH for IPSec Authentication	✓	✓	✓	✓
Logging and Monitoring	Internal Log	✓	✓	✓	✓
	External Log	Syslog Server	Syslog Server	Syslog Server	Syslog Server
	Email Notification	✓	✓	✓	✓
	Event Log and Alarm	✓	✓	✓	✓
	SNMP	SNMP v1, v2c	SNMP v1, v2c	SNMP v1, v2c	SNMP v1, v2c
Traffic Load Balance	Outbound Load Balancing ¹	✓	✓	✓	✓
	Server Load Balancing	-	-	✓	✓
	Load Balance Algorithms	2 Types	3 Types	3 Types	3 Types
	Traffic Redirect at Fail-Over	✓	✓	✓	✓
Bandwidth Management	Policy-Based Traffic Shaping	✓	✓	✓	✓
	Guaranteed Bandwidth	✓	✓	✓	✓
	Maximum Bandwidth	✓	✓	✓	✓
	Priority Bandwidth	✓	✓	✓	✓
High Availability (HA)	WAN Fail-Over	✓ ⁵	✓	✓	✓
	Active/Passive Modes	-	-	✓	✓
	Device Failure Detection	-	-	✓	✓
	Link Failure Detection	-	-	✓	✓
	FW/VPN Session Sync.	-	-	✓	✓
Intrusion Detection (IDS)	Automatic Pattern Update	✓	✓	✓	✓
	DoS, DDoS Protection	✓	✓	✓	✓
	Attack Alarm via Email	✓	✓	✓	✓
Content Filtering	HTTP Type	URL, Keyword	URL, Keyword	URL, Keyword	URL, Keyword
	Script Type	Java, Cookie, ActiveX, VB	Java, Cookie, ActiveX, VB	Java, Cookie, ActiveX, VB	Java, Cookie, ActiveX, VB
	Email Type ¹	Black List, Keyword	Black List, Keyword	Black List, Keyword	Black List, Keyword
IM/P2P Blocking	Instant Message Support ¹	MSN Messenger, Yahoo Messenger,	MSN Messenger, Yahoo Messenger,	MSN Messenger, Yahoo Messenger,	MSN Messenger, Yahoo Messenger,
	Peer to Peer Support ¹	SoftEther, Skype, eMule	SoftEther, Skype, eMule	SoftEther, Skype, eMule	SoftEther, Skype, eMule

¹ Available in future firmware upgrade
² Used in conjunction with D-Link Central Management Device
³ DMZ port is user-configurable
⁴ Maximum performance based on RFC 2544 (for firewall). Actual performance may vary depending on network conditions and activated services
⁵ Available when DMZ port is configured as WAN port

Software Features

Firewall System

- Proprietary firewall system kernel, providing more security than open source-based firewalls
- Stateful Packet Inspection
- ZoneDefense with seamless integration with D-Link LAN switches⁴
- Content filtering and Intrusion Detection
- Time-scheduled policy-based routing and bandwidth management

Virtual Private Network (VPN)

- DES/3DES/AES/TwoFish/Blowfish/CAST-128 encryption
- IKE v.2 and X.509 v.3 authentication
- VPN keep alive/Hub and Spoke

Routing and IP Assignment

- IP alias
- DHCP Server/Client/Relay/over IPsec
- OSPF dynamic routing protocol
- HTTP, FTP, SMTP, H.323, SIP³ Application Layer Gateway
- IEEE 802.1q tag-based VLAN

User Authentication

- Local database, external database with RADIUS/LDAP/Active Directory
- Run-time user authentication
- Multiple authentication servers' simultaneous operation
- IP and MAC address binding

Bandwidth Management

- Guaranteed/Maximum/Priority bandwidth control
- Outbound traffic load balancing³
- Policy-based bandwidth management

Traffic/Device Fault Tolerance

- WAN interface fail-over⁴
- Active/passive modes for High Availability¹

Logging and Reporting

- Device management via HTTP, HTTPS and SSH³
- SNMP v.1, v.2c and SNMP traps³
- Real-time system monitoring and event log/alert
- Built-in LCM module for sample configuration¹
- Supports Central Management System²

¹ Available on DFL-1600 and DFL-2500 only

² Used in conjunction with D-Link Central Management Device

³ Available on DFL-800, DFL-1600 and DFL-2500

⁴ Available on DFL-210 when DMZ port is configured as WAN port

Physical & Environmental

DFL-210

DFL-800

DFL-1600

DFL-2500



	DFL-210	DFL-800	DFL-1600	DFL-2500
Power Input	External Power Adapter	External Power Adapter	Internal Universal Power Supply	Internal Universal Power Supply
Dimensions	235 x 162 x 36 mm Desktop Size	280 x 214 x 44 mm Desktop Size	440 x 254 x 44 mm 19-inch Standard Rack-Mount Width, 1U Height	440 x 454 x 44 mm 19-inch Standard Rack-Mount Width, 1U Height
Operating Temperature	0° to 40°C			
Storage Temperature	-20° to 70°C			
Operating Humidity	5% to 95% non-condensing			
EMI	FCC Class A CE Class A C-Tick	FCC Class B CE Class B C-Tick	FCC Class A CE Class A C-Tick	FCC Class A CE Class A C-Tick
Safety	TUV UL LVD (EN60950)	TUV UL LVD (EN60950)	UL LVD (EN60950)	UL LVD (EN60950)



D-Link Worldwide Offices

U.S.A.	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Luxemburg	TEL: 32-(0)2-517-7111	FAX: 32-(0)2-517-6500
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Poland	TEL: 48-(0)-22-583-92-75	FAX: 48-(0)-22-583-92-76
Europe (U. K.)	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	Hungary	TEL: 36-(0)-1-461-30-00	FAX: 36-(0)-1-461-30-09
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322
France	TEL: 33-1-30238688	FAX: 33-1-30238689	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	India	TEL: 91-022-26526696	FAX: 91-022-26528914
Belgium	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500	Middle East (Dubai)	TEL: 971-4-3916480	FAX: 971-4-3908881
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Turkey	TEL: 90-212-289-56-59	FAX: 90-212-289-76-06
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	Egypt	TEL: 202-414-4295	FAX: 202-415-6704
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Norway	TEL: 47-99-300-100	FAX: 47-22-309580	LatinAmerica	TEL: 56-2-232-3185	FAX: 56-2-232-0923
Finland	TEL: 358-9-2707 5080	FAX: 358-9-2707-5081	Brazil	TEL: 55-11-218-59300	FAX: 55-11-218-59322
Spain	TEL: 34-93-4090770	FAX: 34-93-4910795	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Portugal	TEL: 351-21-8688493		Russia	TEL: 7-095-744-0099	FAX: 7-095-744-0099 #350
Czech Republic	TEL: 420-(603)-276-589		China	TEL: 86-10-58635800	FAX: 86-10-58635799
Switzerland	TEL: 41-(0)-1-832-11-00	FAX: 41(0)-1-832-11-01	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-1188
Greece	TEL: 30-210-9914 512	FAX: 30-210-9916902	Headquarters	TEL: 886-2-6600-0123	FAX: xxx